PARTS LIST					
ITEM	QTY	REFERENCE DESIGNATOR	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1	PWB	S1101EFF2216	PWB - BARE BOARD	ZIN TECHNOLOGIES
2	2	U1, U2	A1120ELHLT-T	IC SMT PRECISION HALL EFFECT SWITCH, SOT23W	ALLEGRO
3	2	C1, C2	C0805C104K5RACTU	CAPACITOR CERAMIC 0.1uF, 50V, 10% 0805 SMD	KEMET
4	A/R		TZ-211	LABEL, 1/4 BLK LETTERS WHT BACKGROUND	BROTHER
5	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
6	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
7	A/R		SN63PB37/RMA	SOLDER	
8	8"		M22759/11-24-0	WIRE 24 AWG BLK	
9	8"		M22759/11-24-2	WIRE 24 AWG RED	
10	8"		M22759/11-24-3	WIRE 24 AWG ORG	
11	8"		M22759/11-24-4	WIRE 24 AWG YEL	

7. ENGINEER OR TECHNICIAN SHALL FUNCTIONALLY TEST THE COMPLETED ASSEMBLY PRIOR TO CONFORMAL COATING PER TEST PLAN ACME-TST-008.

8. CONFORMAL COATING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1, SHEET 1 AND THE FOLLOWING NOTES:

   A. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.

   △B MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.

   △C MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.

   D. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 5 AND ITEM 6.

9. ENGINEER OR TECHNICIAN SHALL FUNCTIONALLY TEST THE COMPLETED ASSEMBLY AFTER CONFORMAL COATING PER TEST PLAN ACME-TST-008.

10. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.

11. REFERENCE SCHEMATIC: S1101EFS2216

12. MENTOR GRAPHICS CONTROL FILES:
    S1101EFA2216_REV_B_FAB_-_ART_-_SCH_-.ZIP

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.

2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.


3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.

4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.


5. MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 4 BY ATTACHING LABEL TO PART PACKAGING.

6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3 AND THE FOLLOWING NOTES:

   A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PARTS USING SOLDER (ITEM 7.)

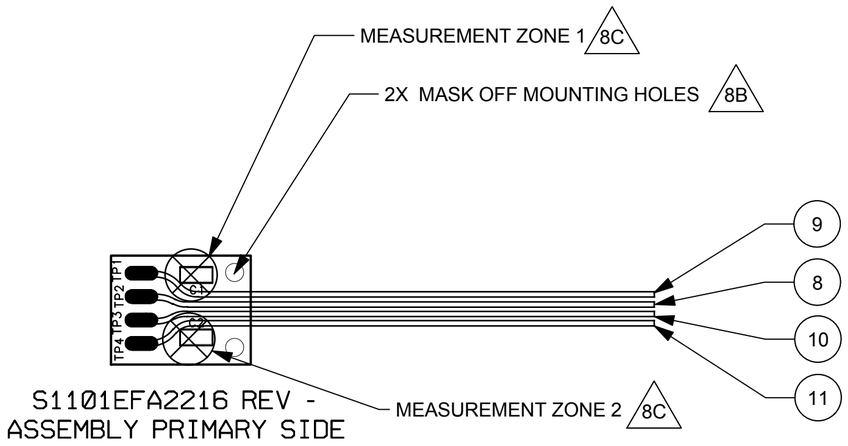

S1101EFA2216 REV -
ASSEMBLY PRIMARY SIDE

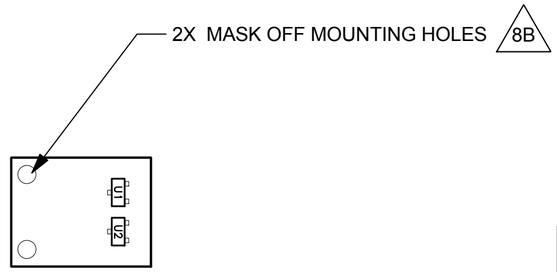

S1101EFA2216 REV -
ASSEMBLY SECONDARY SIDE

WIRE TABLE

ITEM	CONNECTION	LENGTH
9	TP1	8" +4"/-0"
8	TP2	8" +4"/-0"
10	TP3	8" +4"/-0"
11	TP4	8" +4"/-0"

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT APPROVED ECO

APPROVED: E. McCLOSKEY DATE: 5/7/14

ACME-ECO-337 In Process

CHG	ZONE	DESCRIPTION	APP/DATE
B		INCORPORATED ACME-ECO-162	RJP 5/1/14 DAS 5/7/14 TAG 5/2/14
A		INCORPORATED ACME-ECO-053	T GOBELI 8/9/12 M HOMKO 8/8/12 D STRANG 8/7/12

REVISIONS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

TOLERANCE ON

.X	± .05	PROJECT LEAD	B BOROWSKI 6/22/2012
.XX	± .01	QUALITY	D SEELEY 6/21/2012
.XXX	± .005	SAFETY	W BORRELLI 6/15/2012
FRACTION	± X/XX	ENGINEER	T GOBELI 6/15/2012
ANGULAR	± X° XX'	DESIGNER	D STRANG 6/15/2012
BREAK EDGES	.XX-.XX	REVIEWER	M HOMKO 6/15/2012

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

PRIOR TO USE CHECK FOR ANY OUTSTANDING ECO'S WITH CONFIGURATION MANAGEMENT OFFICE

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
440 625-2200

CONTRACT NUMBER: NNC09BA02B
DELIVERY NUMBER: SPACEDOC110
FILE LOCATION: S1101EFA2216_REV_B.bdp
CAD PACKAGE: BLUEPRINT

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

NEXT ASSEMBLY
ACME
CAMERA ASSEMBLY
S1101MFA2200

TITLE
ACME, HALL EFFECT SENSOR BOARD
Assembly Drawing
.

SIZE	DRAWING NUMBER	REV	BLDG	AREA
C	S1101EFA2216	B	ZIN	GRC
			UNITS:	INCH
SCALE: NONE	INITIAL REL DATE 6/11/2012	SHEET 1 OF 1	DISCIPLINE ELECTRICAL	

REV B
DRAWING NUMBER S1101EFA2216
SIZE C